





PRODUCT DOWNLOADS

MULTIPLE SKY BANG


SPEC SHEET

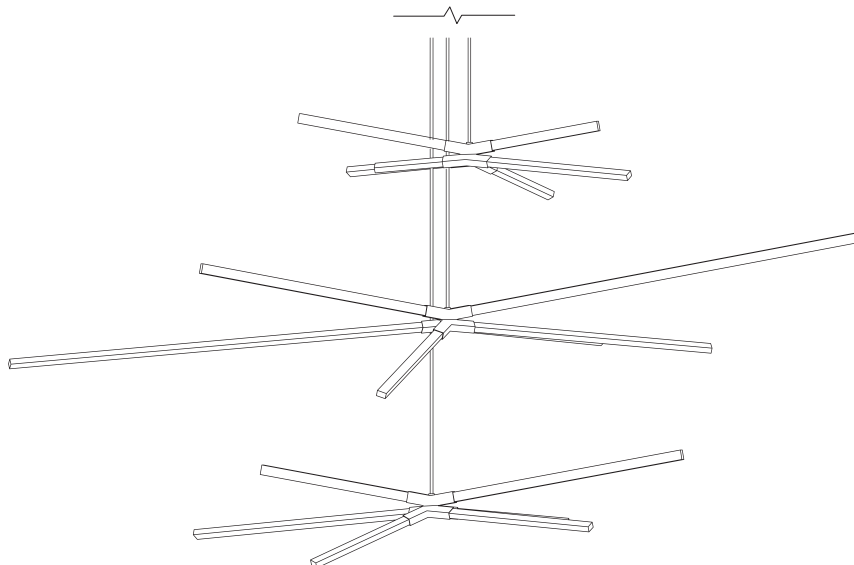

FRONT

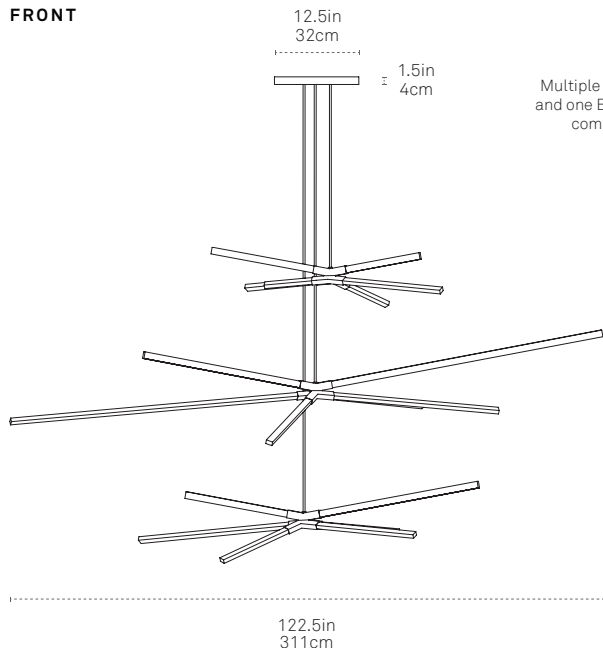

SIDE

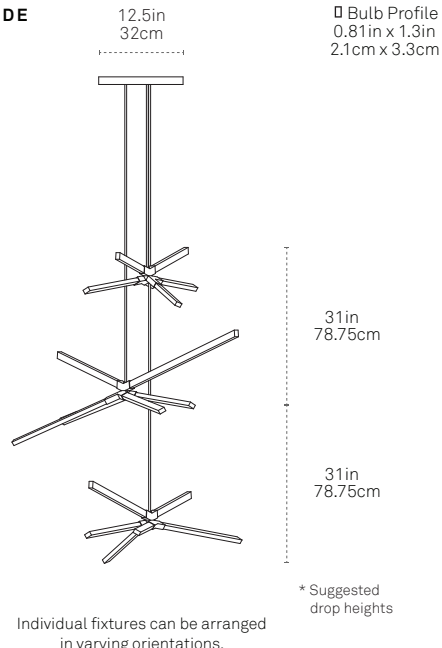

Multiple Sky Bang assumes one Little, one Middle, and one Big Sky Bang on a shared canopy. Alternate combinations are available upon request.

□ Bulb Profile
0.81in x 1.3in
2.1cm x 3.3cm

SPECIFY PRODUCT OPTIONS:

MODEL

MULTI-SKBNG

| WOOD | METAL | COLOR TEMP | DRIVER | OUTPUT | STEM | CEILING |
|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

DESIGN

© 2014

PATENTS

U.S. Patent #D886364

MATERIALS

LED, Sustainably Sourced or Reclaimed Wood, Steel

FEATURES

Fully Dimmable
3 x 120-inch drop stems included
Multiple pendants on shared canopy

CERTIFICATIONS



ORIGIN OF MANUFACTURE

New York City, USA

FIXTURE WEIGHT

57 lbs / 25.9 kg

SHIPPING DIMENSIONS

Ships flat-packed in four boxes.
62in x 7in x 11in (3), 14in x 14in x 4in (1)
61 lbs / 27.7 kg

LIGHT SPECIFICATION

Standard Brightness LEDs :
2,669 Lumens / 94 CRI (3000K) /
86W Power draw

WOOD*

| | | |
|-----------------------------------|--------------------------|--------------------------|
| Maple | <input type="checkbox"/> | <input type="checkbox"/> |
| American Walnut | <input type="checkbox"/> | <input type="checkbox"/> |
| Ebonized Oak | <input type="checkbox"/> | <input type="checkbox"/> |
| Heart Pine (Reclaimed)** | <input type="checkbox"/> | <input type="checkbox"/> |
| Water Tower Redwood (Reclaimed)** | <input type="checkbox"/> | <input type="checkbox"/> |

* Custom options available upon approval.

** Our reclaimed woods exhibit variations in tone and grain.

METAL*

STANDARD FINISH

| | | |
|-------------|--------------------------|--------------------------|
| White | <input type="checkbox"/> | <input type="checkbox"/> |
| Slate Grey | <input type="checkbox"/> | <input type="checkbox"/> |
| Matte Black | <input type="checkbox"/> | <input type="checkbox"/> |

PREMIUM I FINISH

| | | |
|----------------|--------------------------|--------------------------|
| Blackened | <input type="checkbox"/> | <input type="checkbox"/> |
| Brushed Nickel | <input type="checkbox"/> | <input type="checkbox"/> |
| Brushed Brass | <input type="checkbox"/> | <input type="checkbox"/> |

PREMIUM II FINISH

| | | |
|-----------------|--------------------------|--------------------------|
| Polished Nickel | <input type="checkbox"/> | <input type="checkbox"/> |
| Polished Brass | <input type="checkbox"/> | <input type="checkbox"/> |

* Custom options available upon approval.

COLOR TEMP

| | | | | |
|------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| 2400K | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 2700K | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 3000K (Standard) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 4000K | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

DRIVER & DIMMING OPTIONS

| | | | | |
|---|--------------------------|--------------------------|--------------------------|--------------------------|
| 120V (Phase dimming 2-wire) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 120V-277V (Lutron Ecosystem 3-wire+G 1% dim.) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 120V-277V (Universal dimming including 0-10V)** | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

** Recommended for European orders

LIGHT OUTPUT

| | | | |
|--------------------------------------|--------------------------|--------------------------|--------------------------|
| Standard Brightness - 12V (Dimmable) | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|--------------------------------------|--------------------------|--------------------------|--------------------------|

STEM LENGTH*

| | | | |
|--------------------------------------|--------------------------|--------------------------|--------------------------|
| 120" length of 3/8" rigid steel stem | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
| 180" length of 3/8" rigid steel stem | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

* Drop stem can be cut to length on site. 120" is included; contact a sales representative for 180" pricing.

CEILING

| | | |
|----------------|--------------------------|--------------------------|
| Flat Ceiling | <input type="checkbox"/> | <input type="checkbox"/> |
| Sloped Ceiling | <input type="checkbox"/> | <input type="checkbox"/> |






1 2 0

120V driver (2-wire+G Forward phase 1% dimming)

Full manufacturer’s specification sheets can be found at stickbulb.com/drivers/120

Compatible Controls: Lutron Neutral-wire Dimmers

For assistance selecting controls contact Lutron at 1.877.346.5338 or LEDs@lutron.com



| Product | Part Number | Low-End Setting/Load-Type Setting ¹ | Drivers per Control | | |
|---|---------------------|---|---------------------|-----------------|-------------------|
| | | | A: Not Ganged | B: End of Gang | C: Middle of Gang |
| RadioRA 2 adaptive dimmer | RRD-6NA- | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| RA2 Select/RadioRA 2 600 W dimmer | RRD-6ND | Hi-lume 1% 2-Wire LTE LED ² | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| RadioRA 2 1000 W dimmer | RRD-10ND- | Set Device type to "INC/MLV Neutral Dimmer"; Set High-End Trim to 99%; Set Low-End Trim to 35% | 1-13 | 1-13 | 1-13 |
| RadioRA 2 Architectural RF GRAFIK T phase selectable dimmer | RRT-G5NEW- | Trim low-end per APM App Note (Lutron P/N 048534) | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| RadioRA 2 Architectural RF GRAFIK T dimmer | RRT-G25LW- | Trim low-end per APM App Note (Lutron P/N 048534) | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| RadioRA 2 C•L hybrid seeTouch keypad | RRD-HN | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 200 W max | 1-10, 200 W max | 1-10, 200 W max |
| RadioRA 2 GRAFIK T C•L hybrid keypad | RRT-GH | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS adaptive dimmer | HQRD-6NA- | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS 600 W dimmer | HQRD-6ND- | Hi-lume 1% 2-Wire LTE LED ² | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| HomeWorks QS 1000 W dimmer | HQRD-10ND- | Hi-lume 1% 2-Wire LTE LED ² | 1-13 | 1-13 | 1-13 |
| Maestro Wireless 600 W dimmer | MRF2-6ND-120- | Trim low-end per APM App Note (Lutron P/N 048370) | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| Vive Maestro Wireless 600 W dimmer | MRF2S-6ND-120- | Trim low-end per APM App Note (Lutron P/N 048370) | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| HomeWorks QS GRAFIK T hybrid keypad | HQRT-GH | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS Architectural GRAFIK T dimmer | HQRT-G25LW- | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS Architectural GRAFIK T phase selectable dimmer | HQRT-G5NEW- | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| HomeWorks QS designer C•L hybrid seeTouch keypad | HQRD-HN | Hi-lume 1% 2-Wire LTE LED ² | 1-10, 200 W max | 1-10, 200 W max | 1-10, 200 W max |
| GRAFIK T C•L 250 W dimmer | GT-250M-, GTJ-250M- | Set low-end trim per dimmer installation instructions | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| Caséta Wireless Pro 1000 W dimmer | PD-10NXD- | Trim low-end per instructions at casetawireless.com/lowend | 1-13 | 1-13 | 1-13 |
| Caséta Wireless phase selectable dimmer | PD-5NE- | Trim low-end per instructions at casetawireless.com/lowend | 1-20, 400 W max | 1-20, 400 W max | 1-20, 400 W max |

¹ Setting the low-end trim and load type is necessary to ensure optimal performance and 1% dimming capability.

² Also listed as "LED Lutron A-Series 2-Wire" or "Hi-Lume A-Series LTE LED Driver 2-Wire" in previous software releases.


(TO BE CONTINUED ON NEXT PAGE)



(CONTINUED from 1 2 0)

Compatible Controls: Lutron Non-Neutral Dimmers

For assistance selecting controls contact Lutron at 1.877.346.5338 or LEDs@lutron.com

| Product | Part Number | Dimmers per Control | Low-End Setting/Load-Type Setting ¹ | | |
|---|---------------------------------|---|--|-----------------|-----------------|
| Ariadni C•L 250 W dimmer | AYCL-253P- | Set low-end trim dial to 1 o'clock. Adjust slightly if needed. | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| Ariadni C•L 150 W dimmer | TGCL-153P-, AYCL-153P- | Set low-end trim dial to 1 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| Diva C•L 250 W dimmer | DVCL-253P-, DVSCCL-253P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-8, 350 W max | 1-8, 350 W max | 1-8, 350 W max |
| Diva C•L 150 W dimmer | DVCL-153P-, DVSCCL-153P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| Nova  C•L 250 W dimmer | NTCL-250- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-10, 400 W max | 1-10, 400 W max | 1-10, 400 W max |
| Lumea C•L 150 W dimmer | LECL-153P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| Sylark C•L 150 W dimmer | SCL-153P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| Contour C•L 150 W dimmer | CTCL-153P- | Set low-end trim dial to 10 o'clock. Adjust slightly if needed. | 1-6, 250 W max | 1-6, 250 W max | 1-6, 250 W max |
| myRoom DIN power module | MQSE-4A1-D | 1-6 (per output); 1 A maximum driver input current | Hi-lume 1% 2-Wire LTE LED ² | | |
| HomeWorks QS DIN power module | LQSE-4A1-D | 1-6 (per output); 1 A maximum driver input current | Hi-lume 1% 2-Wire LTE LED ² | | |
| HomeWorks QS Phase Adaptive DIN power module | LQSE-4A-120-D | 1-6 (per output); 2 A maximum driver input current | Hi-lume 1% 2-Wire LTE LED ² | | |
| HomeWorks QS wallbox power module | HQRJ-WPM-6D-120 | 2-10 (per output); 26 total per module | Hi-lume 1% 2-Wire LTE LED ² | | |
| HomeWorks wallbox power module | HWI-WPM-6D-120 | 2-10 (per output); 26 total per module | Set load type to "GRX-FDBI or GRX-TVI" | | |
| GRAFIK Eye QS control unit | QSGR-, QSGRJ- | 2-10 (per output); 26 total per unit | Set load type to "Fluorescent Module" | | |
| GRAFIK Eye 3000 control unit | GRX-3100-, GRX-3500- | 2-10 (per output); 26 total per module | Set load type to "GRX-FDBI" or "GRX-TVI" | | |
| RPM-4U module (LCP, HomeWorks QS, GRAFIK Systems, Quantum) | HW-RPM-4U-120, LP-RPM-4U-120 | 2-26 (per output); 26 total per module | Hi-lume 1% 2-Wire LTE LED ² Set load type to "2-1" | | |
| RPM-4A module (LCP, HomeWorks QS, GRAFIK Systems, Quantum) | HW-RPM-4A-120, LP-RPM-4A-120 | 1-13 (per output); 26 total per module | Hi-lume 1% 2-Wire LTE LED ² Set load type to "2-1" | | |
| GP dimming panels | Various | 1-26 | Set load type to "2-1" | | |

¹ Setting the low-end trim and load type is necessary to ensure optimal performance and 1% dimming capability.

² Also listed as "LED Lutron A-Series 2-Wire" or "Hi-Lume A-Series LTE LED Driver 2-Wire" in previous software releases.



DIMMING COMPATIBILITY

Lutron Hi-Lume 1% EcoSystem/3-Wire L3D

Featuring SoftOn/FadeToBlack
Standard & High Brightness

| | | |
|---|---|---|
| 2 | 7 | 7 |
|---|---|---|

120-277V driver (3-wire+G 1% dimming)

Full manufacturer's specification sheets can be found at stickbulb.com/drivers/277

Compatible Controls

For assistance selecting controls, contact Lutron at 1.877.346.5338 or LEDs@lutron.com

| Product | Part Number | | Drivers per Control | | | | Measured Light Output Range |
|--------------------------------------|------------------------|-----------------|-----------------------------------|---------|-------------|---------|-----------------------------|
| | | | 40 W Driver | | 50 W Driver | | |
| | 120 V ~ | 277 V ~ | 120 V ~ | 277 V ~ | 120 V ~ | 277 V ~ | |
| 3-wire Controls: | | | | | | | |
| Nova T | NTF-10- | NTF-10-277- | 1-41 | 1-44 | 1-31 | 1-36 | 100%-1% |
| | NTF-103P- | NTF-103P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| Nova | NF-10- | NF-10-277- | 1-41 | 1-44 | 1-31 | 1-36 | 100%-1% |
| | NF-103P- | NF-103P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| Skylark | SF-10P- | SF-12P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| | SF-103P- | SF-12P-277-3 | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| Diva | DVF-103P- | DVF-103P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| | DVSCF-103P- | DVSCF-103P-277- | 1-20 | 1-33 | 1-15 | 1-27 | 100%-1% |
| Ariadni | AYF-103P- | AYF-103P-277- | 1-20 | 1-44 | 1-15 | 1-27 | 100%-1% |
| Maestro | MAF-6AM- | MAF-6AM-277- | 1-15 | 1-20 | 1-11 | 1-20 | 100%-1% |
| | MSCF-6AM- | MSCF-6AM-277- | 1-15 | 1-20 | 1-11 | 1-20 | 100%-1% |
| Maestro Wireless | MRF2-F6AN-DV- | | 1-15 | 1-33 | 1-11 | 1-27 | 100%-1% |
| RadioRA 2 | RRD-F6AN-DV- | | 1-15 | 1-33 | 1-11 | 1-27 | 100%-1% |
| HomeWorks QS | HQRD-F6AN-DV | | 1-15 | 1-33 | 1-11 | 1-27 | 100%-1% |
| Interfaces ¹ | PHPM-3F-120 | - | 1-41 | - | 1-31 | - | 100%-1% |
| | PHPM-3F-DV | | 1-41 | 1-88 | 1-31 | 1-72 | 100%-1% |
| GP Dimming Panels | Various | | 1-41 | 1-88 | 1-31 | 1-72 | 100%-1% |
| EcoSystem Controls: | | | | | | | |
| PowPak dimming module with EcoSystem | RMJ-ECO32-DV-B | | 32 per EcoSystem link | | | | 100%-1% |
| | FCJ-ECO | | 3 per EcoSystem link ² | | | | 100%-1% |
| Energi Savr Node with EcoSystem | QSN-1ECO-S, QSN-2ECO-S | | 64 per EcoSystem link | | | | 100%-1% |
| GRAFIK Eye QS with EcoSystem | QSGRJ-_E, QSGR-_E | - | 64 per EcoSystem link | | | | 100%-1% |
| Quantum | Various | | 64 per EcoSystem link | | | | 100%-1% |

¹ For use with 3-wire controls or Commercial Systems, RadioRA 2 Systems or Home Systems applications.

² Up to 3 drivers controlled as a single zone (broadcast EcoSystem).



0 1 0

120V-277V driver (Universal dimming including 0–10V)

Full manufacturer’s specification sheets can be found at stickbulb.com/drivers/010

Low-Voltage Compatible Dimmer brands: Crestron, Lutron, Leviton

For assistance selecting controls, contact LTF at +1 (847) 498-5832 or LTFsales@LTFtechnology.com

| Brand | Part number |
|----------|---------------|
| Crestron | CLS-C6 |
| Crestron | CLS-C6M |
| Crestron | CLS-C6EX |
| Crestron | CLS-C6MEX |
| Crestron | CLS-EXP-DIM |
| Crestron | CLS-EXP-DIMU |
| Crestron | CLX-2DIM8 |
| Crestron | DIN-1DIM4 |
| Crestron | DIN-1DIMU4 |
| Crestron | CLW-DIMEX-E |
| Crestron | CLW-DIMEX-P |
| Crestron | CLW-DIMSWEX-E |
| Crestron | CLW-DIMSWEX-P |
| Crestron | GLX-DIM6 |
| Crestron | GLXX-2DIM8 |
| Crestron | P-DIMEX |
| Crestron | CLW-DELVEX-E |
| Crestron | CLW-DELVEX-P |

| Brand | Part number |
|--------|----------------|
| Lutron | DVCL-153P |
| Lutron | DVELV-303P |
| Lutron | HQRD-6A |
| Lutron | HQRD-6NA- |
| Lutron | NTELV-300- |
| Lutron | NTELV-600- |
| Lutron | NVELV-600- |
| Lutron | VTELV-600M |
| Lutron | MAELV-600- |
| Lutron | MSCELV-600M |
| Lutron | MIRELV-600- |
| Lutron | MRF2-6ELV-120- |
| Lutron | SELV-300P |
| Lutron | CTELV-303P |
| Lutron | SELV-600- |

| Brand | Part number |
|---------|-------------|
| Leviton | Model 6615 |
| Leviton | Model 6672 |
| Leviton | Model 6674 |
| Leviton | Model IPL06 |
| Leviton | Model IPE04 |
| Leviton | Model IPI06 |
| Leviton | Model VP106 |
| Leviton | Model VPE04 |
| Leviton | Model VPM06 |
| Leviton | Model VRE04 |
| Leviton | Model VRM10 |



All of our wood and metal products should be dusted by hand with a dry Swiffer pad (or equivalent) on a regular schedule to maintain surface integrity. It is imperative that none of our products come into contact with bleach, vinegar, lemon juice or any household product which may contain these or other solvents.

If any part of one of our fixtures becomes soiled with dried residue or grime, wipe the affected area with a soft cloth dampened very lightly with warm water and immediately wipe dry with another soft cloth. If this does not complete the task, wipe with a cloth soaked in diluted mild liquid dish soap and again immediately dry.

Fingerprints on our Nickel-plated, Brass-plated, and Blackened metal hardware can be removed with a clean, dry, soft cloth. We recommend an ultra-fine, textureless microfiber cleaning cloth (as one uses to clean glass).

All of our Brass hardware is treated with a protective coating to prevent tarnish. It should need no more than a wipe with a clean, dry, soft cloth to remove fingerprints and dust.

Brushed metal surfaces should be buffed in the direction of the grain.

For scratches in wood we highly recommend Claphams beeswax, which is non-toxic and can be applied by hand. Rub a small amount into the scratch area and buff with a dry cloth.

