




FRONT

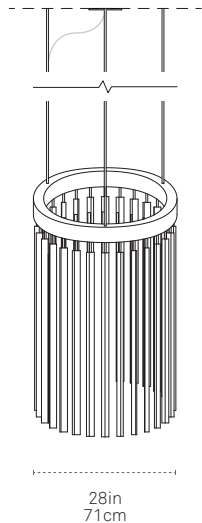


SIDE

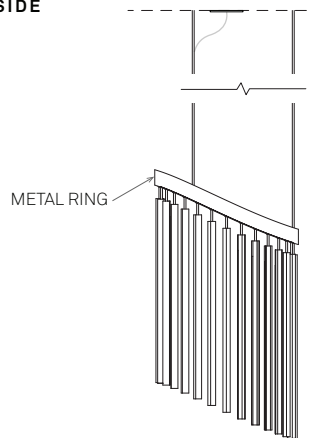

PLAN

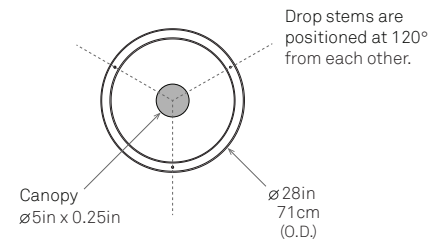

□ Bulb Profile  
0.81 in x 1.3 in  
2.1 cm x 3.3 cm



All Chime fixtures feature a 360° BALL JOINT that allows each bulb to rotate within its socket.

## SPECIFY PRODUCT OPTIONS:

## MODEL

M3-CHM

## WOOD

## METAL

## COLOR TEMP

## DRIVER

## OUTPUT

## STEM

## DESIGN

© 2019

## MATERIALS

LED, Sustainably Sourced or  
Reclaimed Wood, Steel

## FEATURES

Fully Dimmable  
3 x 60-inch drop stems included  
360° ball joint allows each bulb  
to rotate within its socket

## CERTIFICATIONS



## ORIGIN OF MANUFACTURE

New York City, USA

## FIXTURE WEIGHT

58 lbs / 26.3 kg

## SHIPPING DIMENSIONS

Shipping dimensions TBD  
based on order details.

## LIGHT SPECIFICATION

Standard Brightness LEDs:  
5,457 Lumens / 94 CRI (3000K) /  
176W Power draw

## WOOD\*

## STANDARD

Maple

M A

American Walnut

W A

Ebonized Oak

E O

## PREMIUM

Heart Pine (Reclaimed)\*\*

H P

Water Tower Redwood (Reclaimed)\*\*

W T

\* Custom options available upon approval.

\*\* Our reclaimed woods exhibit variations in tone and grain.

## METAL\*

## METAL RING FINISH

Matte Black Powder Coat\*\*

M B

\*\* Matte Black canopy, black fabric chord

## BALL JOINT FINISH

Polished Nickel

P N

\* Custom options available upon approval.

## COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

## DRIVER &amp; DIMMING OPTIONS

0-10V dimming\*

0 1 0

\*See Driver Information page.

For phase dimming options (Triac &amp; ELV) please inquire.

## LIGHT OUTPUT

Standard Brightness - 12V (Dimmable)

S B

## STEM LENGTH\*

Segmented length of rigid steel stem \*\*  
3/8"ØX X X  
(inches)


\* See stem length guideline page to calculate stem length

\*\* Length written in inches in corresponding box



## ALTERNATE CONFIGURATIONS

Occasionally our products have unlisted variations. If you are interested in an alternate configuration, please reach out to [orders@stickbulb.com](mailto:orders@stickbulb.com)

FRONT

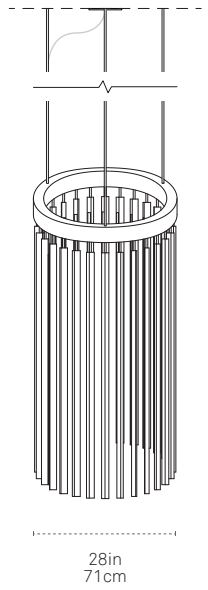


SIDE

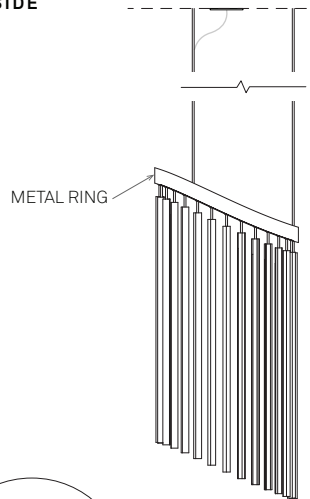62.21in  
158cm

BALL JOINT

All Chime fixtures feature a 360° BALL JOINT that allows each bulb to rotate within its socket.

PLAN



□ Bulb Profile  
0.81in x 1.3in  
2.1cm x 3.3cm

Drop stems are positioned at 120° from each other.

## SPECIFY PRODUCT OPTIONS:

## MODEL

M4-CHM

## DESIGN

© 2019

## MATERIALS

LED, Sustainably Sourced or  
Reclaimed Wood, Steel

## FEATURES

Fully Dimmable  
3 x 60-inch drop stems included  
360° ball joint allows each bulb  
to rotate within its socket

## CERTIFICATIONS



## ORIGIN OF MANUFACTURE

New York City, USA

## FIXTURE WEIGHT

67 lbs / 30.4 kg

## SHIPPING DIMENSIONS

Shipping dimensions TBD  
based on order details.

## LIGHT SPECIFICATION

Standard Brightness LEDs :  
7,420 Lumens / 94 CRI (3000K) /  
240W Power draw

## WOOD

## WOOD\*

## STANDARD

Maple

M A

American Walnut

W A

Ebonized Oak

E O

## PREMIUM

Heart Pine (Reclaimed)\*\*

H P

Water Tower Redwood (Reclaimed)\*\*

W T

\* Custom options available upon approval.

\*\* Our reclaimed woods exhibit variations in tone and grain.

## METAL\*

## METAL RING FINISH

Matte Black Powder Coat\*\*

M B

\*\* Matte Black canopy, black fabric chord

## BALL JOINT FINISH

Polished Nickel

P N

\* Custom options available upon approval.

## DRIVER

## OUTPUT

## STEM

## COLOR TEMP

2400K

2 4 0 0

2700K

2 7 0 0

3000K (Standard)

3 0 0 0

4000K

4 0 0 0

## DRIVER &amp; DIMMING OPTIONS

0-10V dimming\*

0 1 0

\*See Driver Information page.

For phase dimming options (Triac &amp; ELV) please inquire.

## LIGHT OUTPUT

Standard Brightness - 12V (Dimmable)

S B

## STEM LENGTH\*


Segmented length of rigid steel stem \*\*  
3/8"ØX X X  
(inches)

\* See stem length guideline page to calculate stem length

\*\* Length written in inches in corresponding box

CALCULATE STEM LENGTH


$$\boxed{\text{A}} \text{ Floor to Ceiling (inches)} - \boxed{\text{B}} \text{ Drop Height (inches)} - \boxed{\text{C}} \text{ Chime Length (inches)} = \boxed{\text{D}} \text{ Stem Length (inches)}$$

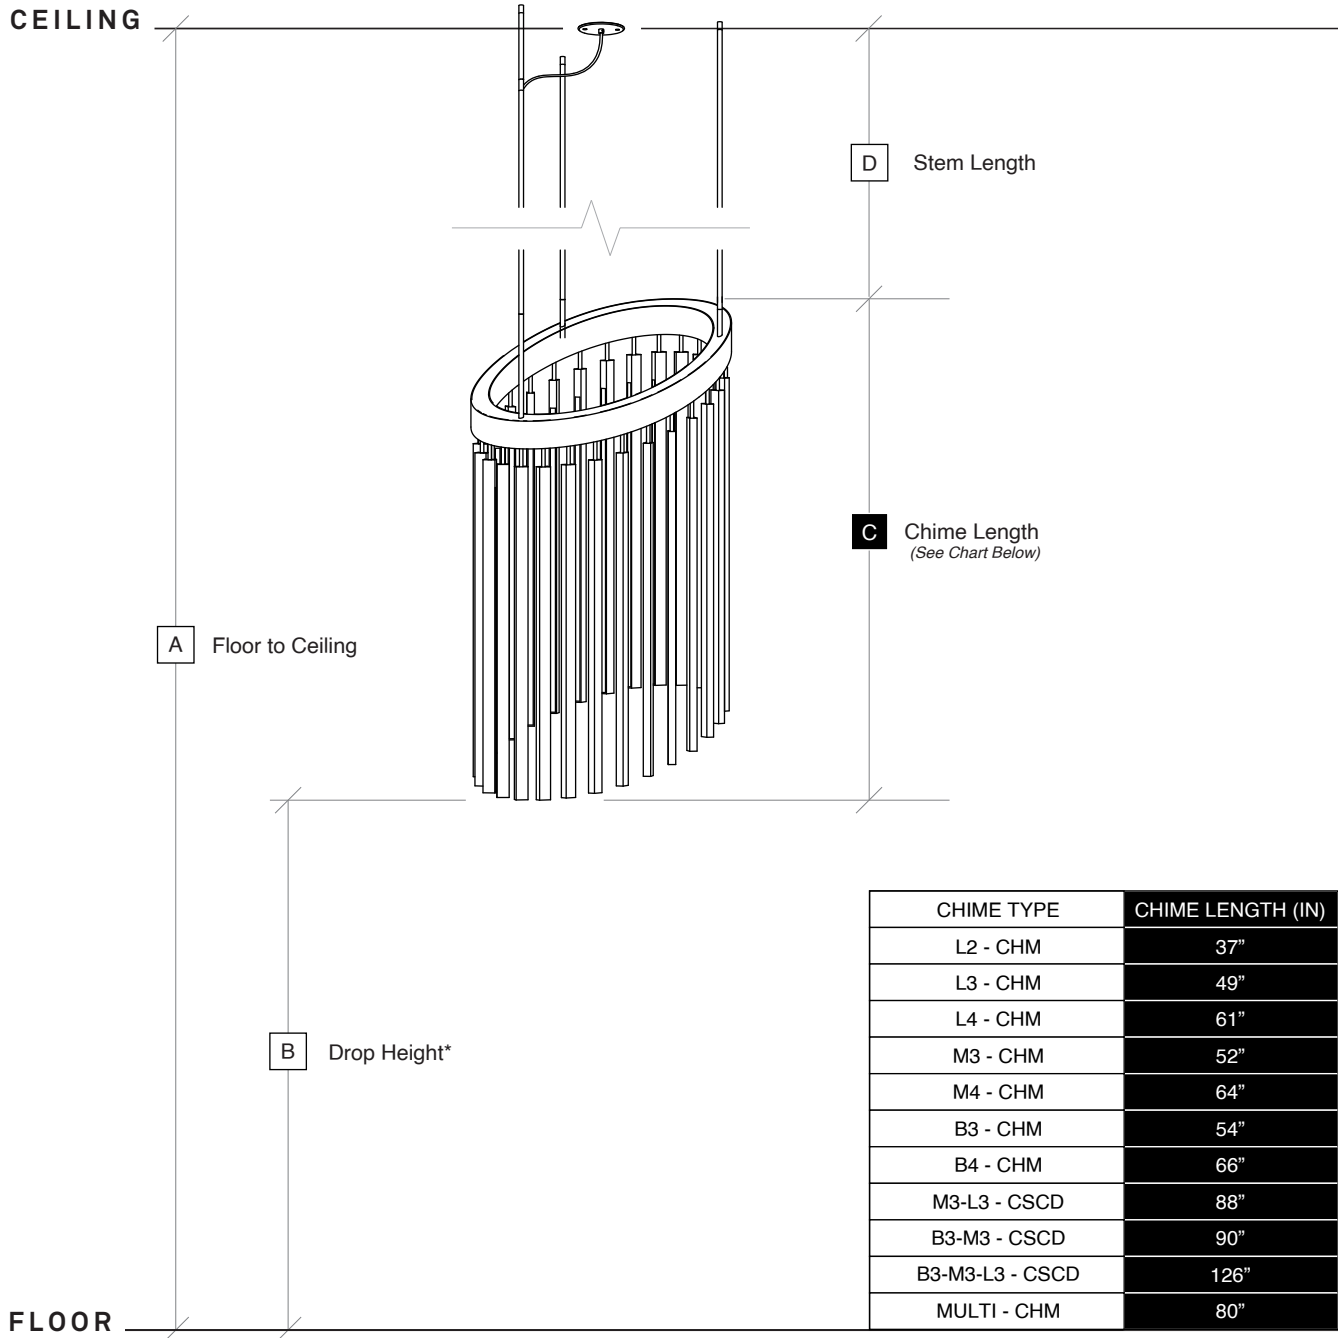

\* Stickbulb recommends using the highest possible 'Drop Height.'

We will include 3 additional segmented stem sets in 2" increments. This will allow you to drop the fixtures between 2" to 6" lower.

\*\* Note: each ring requires separate AC input + dimming control

**120V-277V driver (0-10V dimming)**

Full manufacturer's specification sheets can be found at

[stickbulb.com/drivers/UNI25](https://stickbulb.com/drivers/UNI25)

**Low-Voltage Compatible Dimmer brands: Crestron, Lutron, Leviton**

For assistance selecting controls, contact LTF at +1 (847) 498-5832 or [LTFsales@LTFtechnology.com](mailto:LTFsales@LTFtechnology.com)

Brand	Part number
Lutron Diva	0-10V DTV
Lutron Diva	0-10V DTV

Brand	Part number
Leviton	IP710
Leviton	DS710
Leviton	DD710

All of our wood and metal products should be dusted by hand with a dry Swiffer pad (or equivalent) on a regular schedule to maintain surface integrity. It is imperative that none of our products come into contact with bleach, vinegar, lemon juice or any household product which may contain these or other solvents.

If any part of one of our fixtures becomes soiled with dried residue or grime, wipe the affected area with a soft cloth dampened very lightly with warm water and immediately wipe dry with another soft cloth. If this does not complete the task, wipe with a cloth soaked in diluted mild liquid dish soap and again immediately dry.

Fingerprints on our Nickel-plated, Brass-plated, and Blackened metal hardware can be removed with a clean, dry, soft cloth. We recommend an ultra-fine, textureless microfiber cleaning cloth (as one uses to clean glass).

All of our Brass hardware is treated with a protective coating to prevent tarnish. It should need no more than a wipe with a clean, dry, soft cloth to remove fingerprints and dust.

Brushed metal surfaces should be buffed in the direction of the grain.

For scratches in wood we highly recommend Claphams beeswax, which is non-toxic and can be applied by hand. Rub a small amount into the scratch area and buff with a dry cloth.